

# WIREFLOW

Design by Arik Levy.

# VIBIA

## Reference

**0305.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with eight LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

## Diffuser

Pressed-glass diffuser

## Materials


Ceiling rose: Steel  
Body: Aluminum  
Horizontal rods: Steel  
Ceiling rose: Steel

## Finish



**0305-04** Black (RAL 9005)

## Sketch



## Electrical characteristics

6 x LED 4,48W 350mA

Total 26.9 W



A+



**Light source:** 2700K CRI >80 2942 lm 109 lm/W

**Fixture:** 1180 lm 43.7 lm/W

**Driver included:** CC - Constant Current 350 mA 110-240V 50/60Hz

**Electronic dimming** DALI 1-10V Push

[ficha.fichatecnicaproducto.regulacion.opcional](#) Casambi

## Physical characteristics

2 Box / 0.09 x 1.16 x 1.13 m. / Vol. 0.2100 m<sup>3</sup> /

Gross weight 11.1 kg. / Net weight 10.0 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 2941.60

Maximum value : 53.87


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

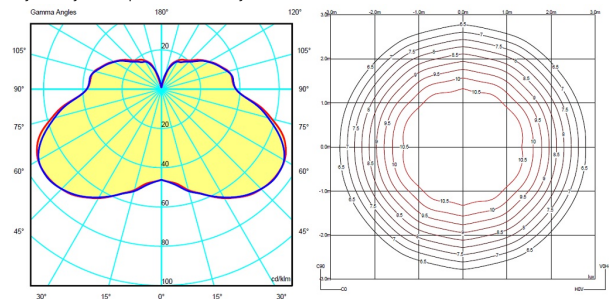

## Certificates

