

# WIREFLOW

Design by Arik Levy.

## Reference

**0360.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. Hanging lamp. The elegant structure of fine cables and LED terminal by Wireflow allows the combination of multiple individual pieces to carry out major graphic lighting installations which generate a visual opportunity of lines and points of light and bring a markedly conceptual character to an intangible product. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. The electrical connection point can be positioned on the ceiling or wall.

## Diffuser

Pressed-glass diffuser

## Materials

Ceiling rose: Steel

Body: Aluminum


Rods: Steel

## Finish



**0360-04** Black (RAL 9005)

## Sketch



## Electrical characteristics

9 x LED 4,48W 350mA

Total 40.3 W



# VIBIA



**Light source:** 2700K CRI >80 4412 lm 109 lm/W

**Fixture:** 1770 lm 43.7 lm/W

**Driver included:** CC - Constant Current 350 mA 110-240V 50/60Hz

**Electronic dimming** DALI 1-10V Push

**ficha.fichatecnicaproducto.regulacion.opcional** Casambi

## Physical characteristics

1 Box / 0.27 x 0.60 x 0.60 m. / Vol. 0.0972 m<sup>3</sup> /

Gross weight 9.1 kg. / Net weight 8.2 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 40.11%

Coordinate system : CG

Total flux : 4412.40

Maximum value : 53.87


Light position : C=15.00 G=55.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

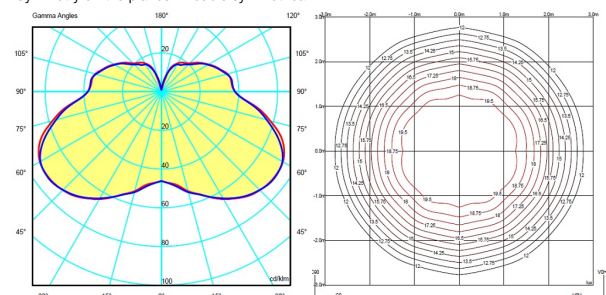

## Certificates

